

# Poly-Classic® FRP Round Columns


## Non-Tapered Round Shaft Specifications

### LIMITED LIFETIME WARRANTY

Poly-Classic® FRP columns are virtually maintenance-free. They are impervious to termite and carpenter ant attack as well as staining and decaying fungi. High-humidity environments have no effect on these non-porous, waterproof columns. All Turncraft Poly-Classic® columns are covered by a limited lifetime warranty to the original purchaser. Warranty details are available from your distributor or our website-[Turncraft.com](http://Turncraft.com).

### PLAN TYPES

Poly-Classic® FRP square columns are available in the below plan types. Please specify when you order. (Fractional components shown are typical. Customer may specify actual returns, wall thicknesses, etc.)

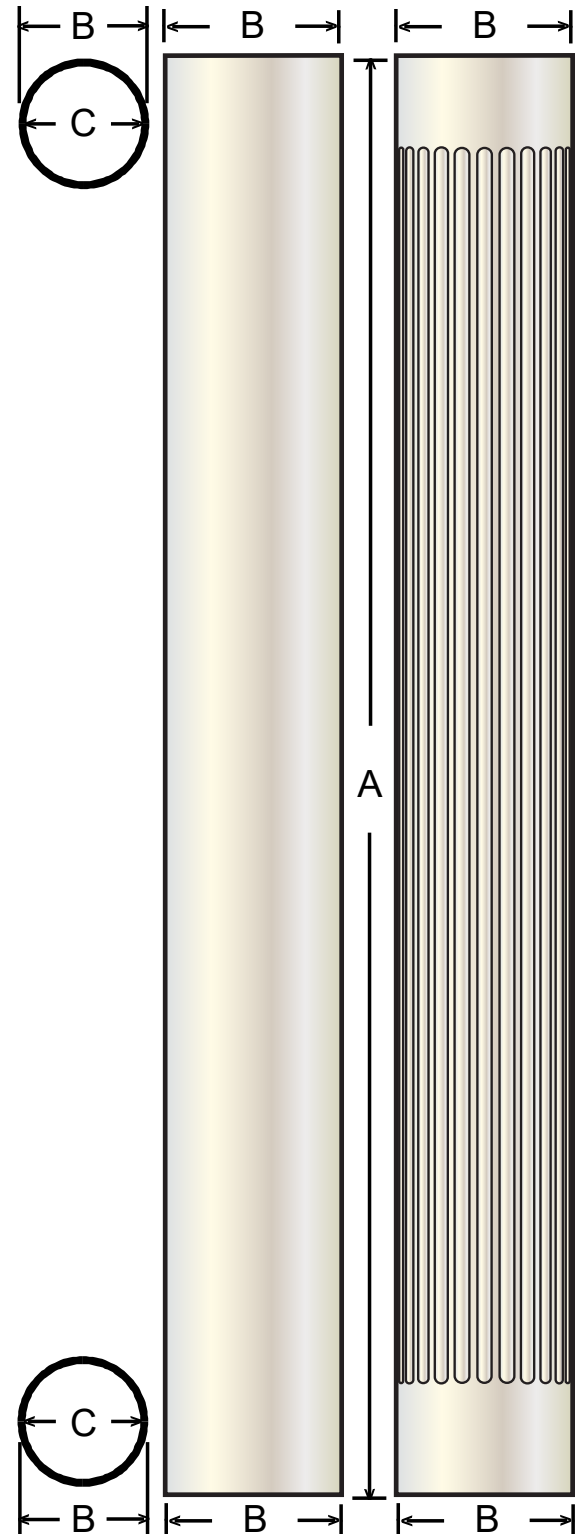

Column Nominal Diameter	Shaft Height A	Shaft Diameters *		Space Available Inside Shaft		Flute Width (24 each)	Concentric Load	Eccentric Load
		Outside Diameter B	Inside Diameter C	For Round Post	For Square Post			
8"	8'	7 5/8"	6 3/4"	6 3/8"	4 1/2"	11/16"	10,000 lb.	6,600 lb.
	10'							
10"	8'	9 11/16"	8 3/8"	8"	5 5/8"	7/8"	14,000 lb.	10,720 lb.
	10'							
12"	8'	11 5/8"	10 3/4"	10 3/8"	7 5/16"	1"	18,000 lb.	13,200 lb.
	10'							
	12'							
14"	8'	13 1/2"	11 1/2"	11 1/8"	7 7/8"	1 5/16"	20,000 lb.	11,520 lb.
	10'							
	12'							
	14'							
16"	8'	15 7/16"	13 1/2"	13"	9 3/16"	1 1/2"	20,000 lb.	13,200 lb.
	10'							
18"	8'	17 3/8"	15"	14 1/2"	10 1/4"	1 11/16"	20,000 lb.	9,040 lb.
	10'							
	11'							
20"	8'	19 3/8"	18"	16 1/2"	11 5/8"	1 7/8"	20,000 lb.	18,960 lb.
	10'							
	11'							
24"	8'	23 3/8"	21 1/4" (top ID)	19 1/2"	13 3/4"	2 5/16"	20,000 lb.	13,200 lb.
	10'							
	12'							
	14'							
	15'							

Column Bottom Diameter ‡	8'	10'	11'	12'	14'	15'
8"	✓	✓				
10"	✓	✓				
12"	✓	✓		✓		
14"	✓	✓		✓	✓	
16"	✓	✓				
18"	✓	✓	✓			
20"	✓	✓	✓			
24"	✓	✓		✓	✓	✓

All Poly-Classic® FRP Columns are available with custom fluting.  
 ✓ Available Unfluted